








EN AW-6082 T5

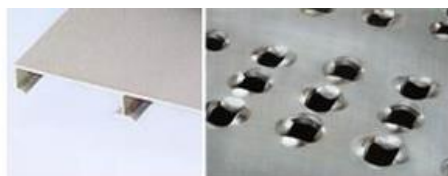

Section/Number Symbol	Height mm	Width mm	Weight kg/m	kg/m ²	Stock length m	Static values I, cm ⁴	W, cm ²
Standard sections							
200/30 No. 31 117 	30	200/ 213.5*	2.39 (2.57)		6.0	7.95 (9.14)	4.45 (4.63)
300/30 No. 31 118 	30	300	3.31 (3.57)	11.1 (11.9)	6.0	11.78 (13.48)	6.56 (6.79)
400/30 No. 34 895 	30	400	4.35 (4.69)	10.9 (11.7)	–	15.59 (17.82)	8.65 (8.78)
600/30 No. 31 119 	30	600	6.48 (6.93)	10.8 (11.6)	6.0	23.21 (26.51)	12.84 (13.24)
200/40 St No. 31 903 Step section 	40	215	3.01 (3.18)		6.0	21.61 (24.42)	9.42 (9.77)
K1/40 No. 31 904 Edging section 		35	0.67		6.0	3.76	1.96

Special section

400/50 No. 36 723 	50	400	5.23 (5.66)	13.1 (14.2)	6.0	56.61 (65.77)	19.17 (20.10)
--	----	-----	----------------	----------------	-----	------------------	------------------





* Width including supporting flange

Data given for weight and static cross-sections are based on nominal dimensions.

Data in parentheses refer to non-punched products.

Longer sections, other aluminium alloys and non-punched sections on request.

Accessories

Designation	Symbol	Weight** gms each	Designation	Symbol	Weight** gms each
BU 1 Fixing from below 		≈ 100	KU 1 Coupling from below 		≈ 70
BO 2 Fixing from above 		≈ 130	KO 2 Coupling from above 		≈ 80

** Complete with bolts